




C2G
16.4ft (5m) MTP/MPO 62.5/125 Multimode Fiber Optic Assembly Ribbon Cable - Plenum CMP-Rated - Orange
Part No. CG-33087

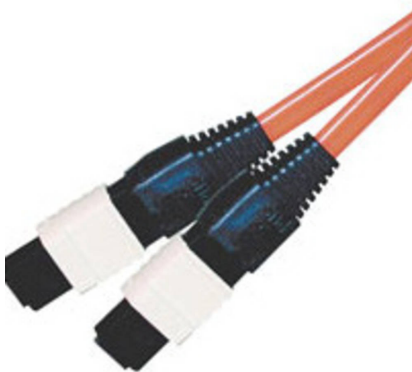

Make MTP/MPO your choice for high density fiber networks; it's specifically designed for fast ethernet, fiber channel, ATM and gigabit ethernet applications. Save time and money with MTP/MPO's increased ease of installation - simply pull one cable rather than twelve. Each MTP/MPO fiber assembly consists of twelve laser-optimized, 62.5/125 multimode fibers under one OFNP plenum-rated jacket.

With our MTP/MPO, it's possible to run a single cable that automatically terminates twelve fibers in one easy plug-in. Plus, the small form factor of an MTP/MPO connector provides a higher port density. With its push-pull release mechanism, the MTP/MPO connector is easy to engage and disengage. Plus, its latch design prevents the plug from snagging when jumper cables are being routed. Straight-through pinning; immune to electrical interference.

Please Note: MTP/MPO is a registered trademark of US Conec Ltd.

Features & Benefits

Designed to support gigabit ethernet, fibre channel, ATM, or any application that requires high speed data transfer	Plenum rated for cable runs through walls and drop ceilings with plenum air space
Ease of installation - simply pull one cable rather than twelve	Small form factor provides a higher port density
Push-pull release mechanism and latch design for easy use	

Specifications

General Info

Product Line	C2G	Color	Orange
UPC Number	757120330875	Country Of Origin	China
Application Sector	Commercial, Industrial	Warranty Type	Lifetime
Type	Cable		

Dimensions

Product Length US	16.4 FT	Cable Length	16.4 ft
-------------------	---------	--------------	---------

Technical Information

Fiber Optic Cable Type	MPO, MTP, Multimode	Jacket Material	PVC (Polyvinyl Chloride)
Jacket Application	Plenum Rated	Bend Radius	45 mm
Cable Type	Fiber Optic	Jacket Rating	CMP Rated, FT6 Rated
Cable Diameter	3 mm	Adapter Rear	MTP
Adapter Front	MTP	Fiber Size	62.5/125